

AMPHIBIOUS EXCAVATOR

AN EXCAVATOR THAT FEAR NO TERRAINS




An **AMPHIBIOUS EXCAVATOR** is specifically designed to manoeuvre in marshes, swampy area and soft terrain with the ability to float on water as an added safety feature. Thanks to the patented 'multi-synchronous hydraulic motor direct drive' system, the pivotal technology that positions us at the forefront of amphibious excavator design. The paradigm shift in how modern amphibious machine is being designed has won over the heart of numerous customers, both new and experienced amphibious excavator users in the industry.



The amphibious excavator is **completely self-propelled**, it can access virtually any soft terrains where standard excavator fear most. Such machine has proven itself over and over again and has performed exceedingly well in the followings applications;

APPLICATION

- Maintenance and cleaning of waterways, lakes, shorelines, ponds, etc.
- Erosion control and prevention.
- Deepening of waterways and river deltas.
- Maintenance and repair of natural environment.
- Flood protection and flood maintenance works.
- Landscape building and protection.
- Accessing difficult strands of water/soft terrain.
- Swamp and wetland construction.
- Road building through wetlands.

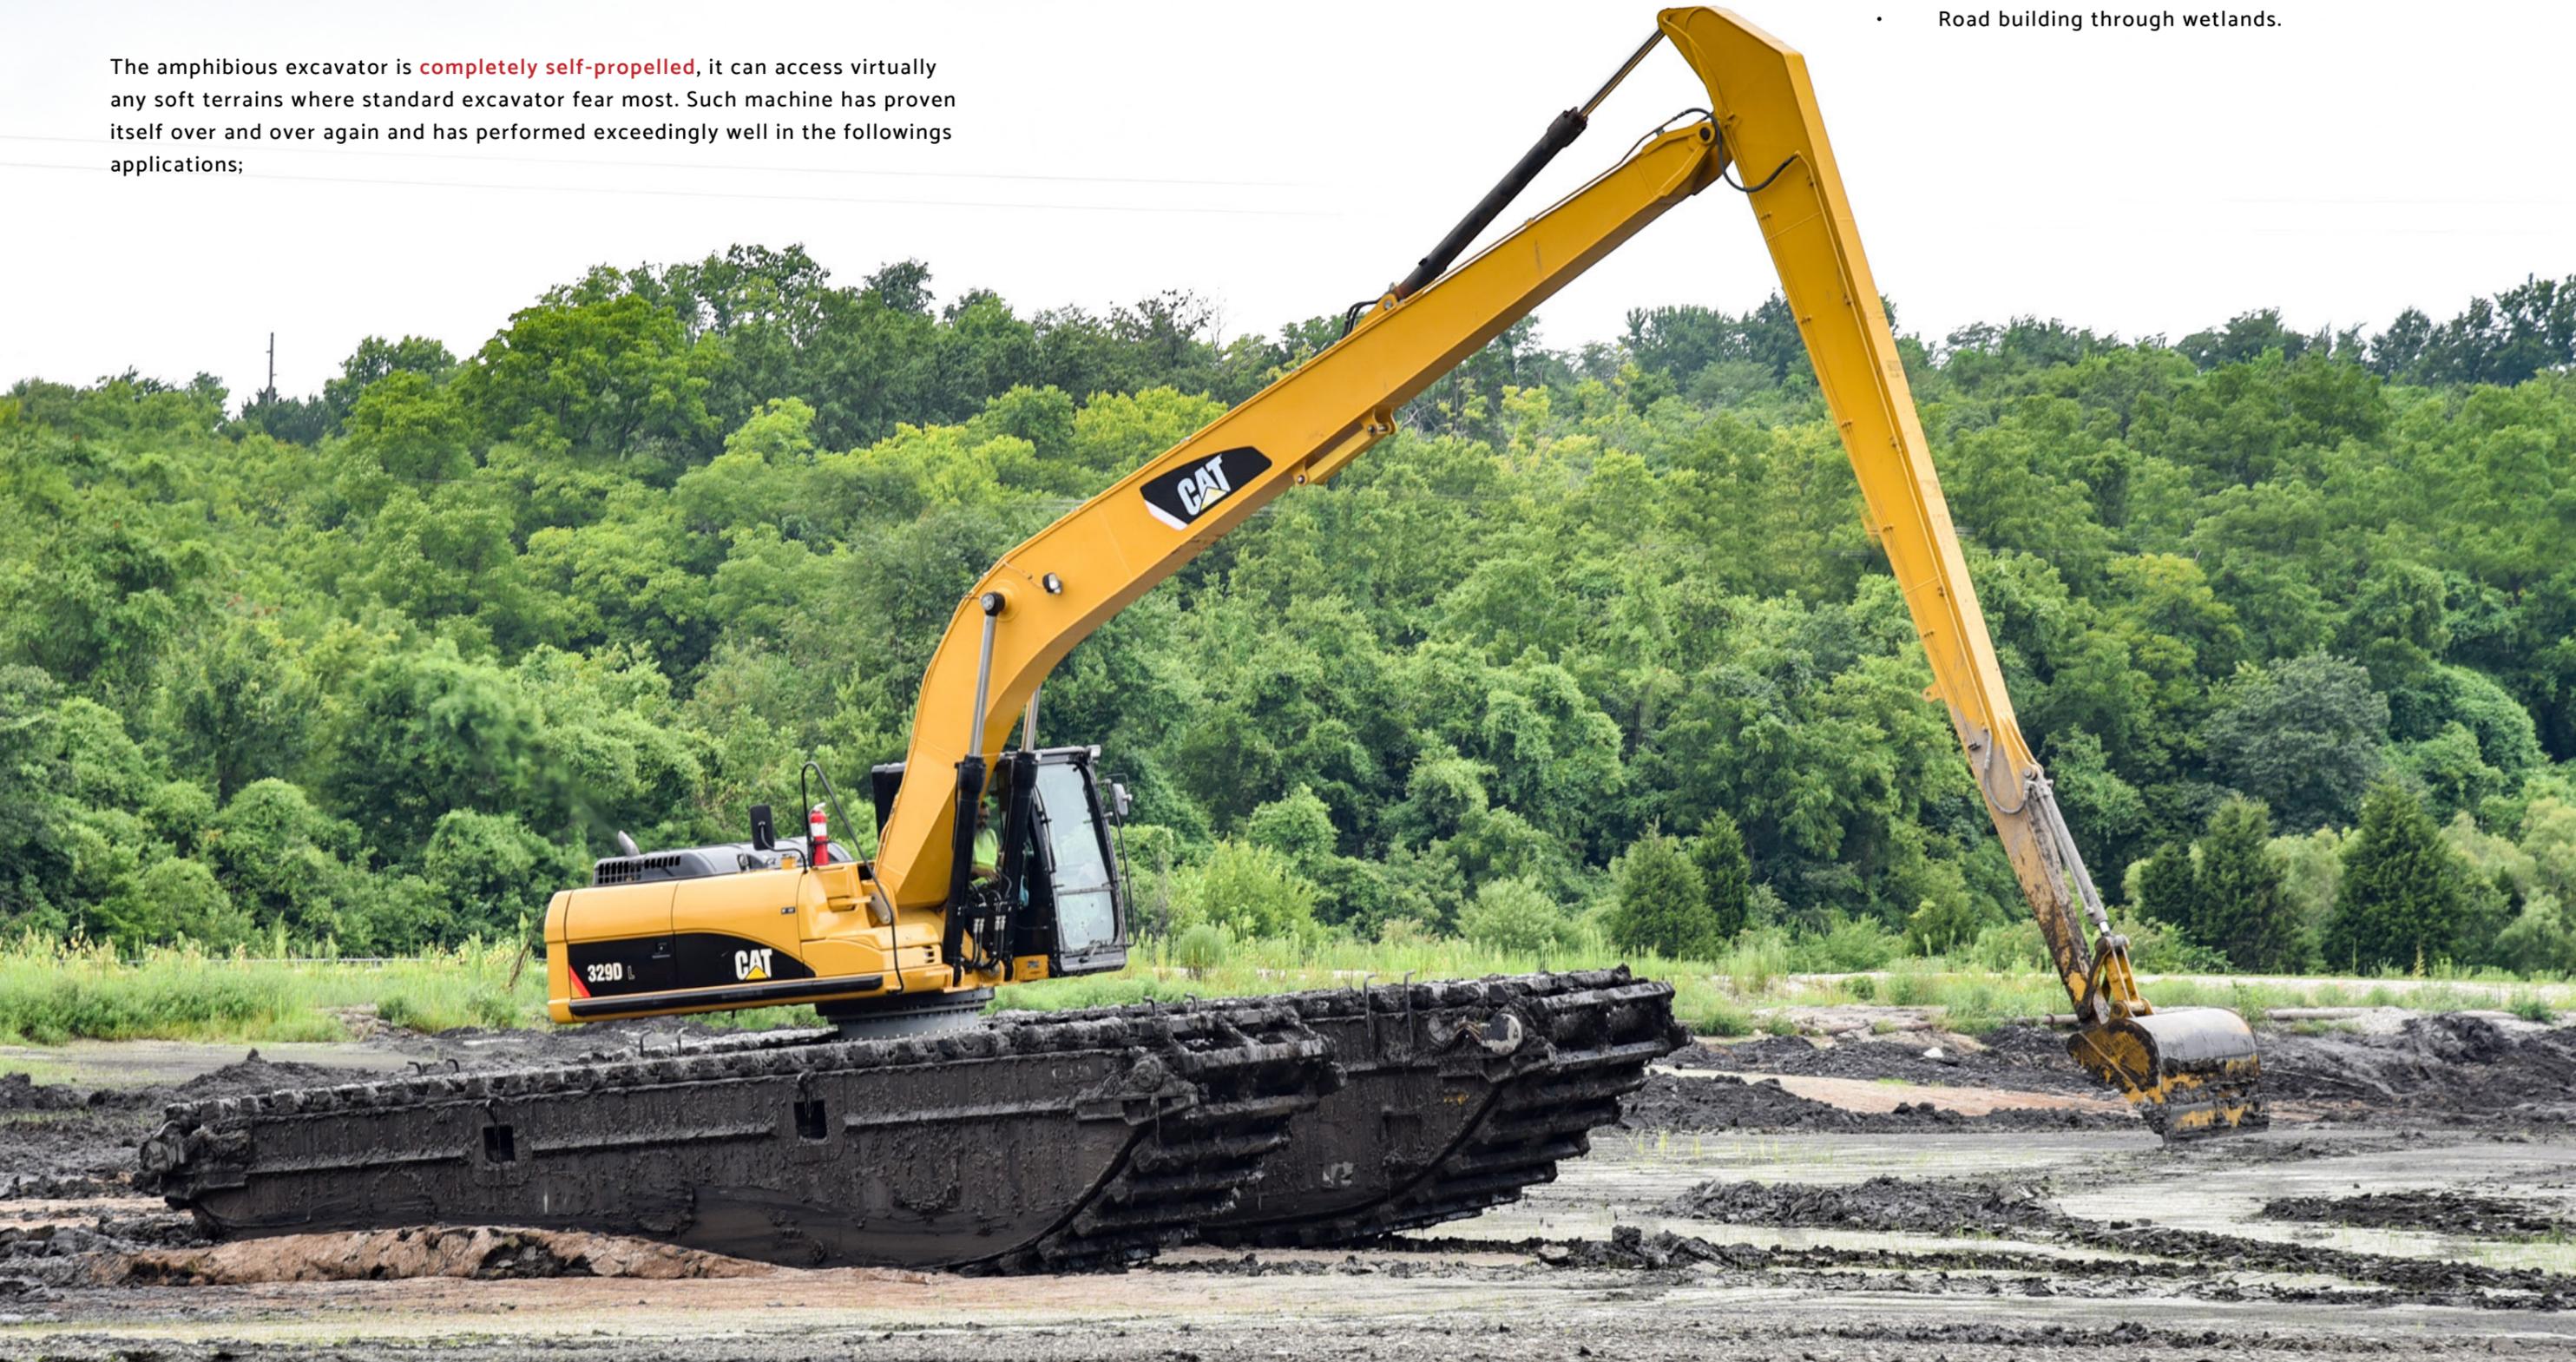

INDUSTRY LEADING FEATURES

FINAL DRIVE SYSTEM

- A break through in final drive design, the patented 'multi-synchronous direct drive' hydraulic motor on each pontoon. Multiple active motors propelling each pontoon provide superior tracking power, making it virtually undeterred in any terrain.
- Increased in reliability. New motor supplier has strong track record for its quality.
- A leading OEM supplier to global leading excavator manufacturers.

ENHANCED PONTOON DESIGN

- Steel strength increased by 100%.
- Wear resistance property increased by 100%.
- Rigidity increased by at least 30%.
- Reduced the maintenance cycle and operating cost.

HYDRAULICALLY EXTENDABLE

- Innovative technology of undercarriage allows each pontoon to extend outwardly via hydraulic function, providing the extra stability whenever the situation calls for.
- pontoons can be retracted to its narrow position during land transportation.
- Control functions can be executed comfortably with ease from the cabin.

MODULAR DESIGN

- Transportation width reduced by 4-7% (model dependent)
- Floating capacity maintained.
- Floating capacity for AM80-5E has increased by 15%.




PROPRIETARY TECHNOLOGIES

CENTER FRAME

- Detachable slewing ring adaptor design increased flexibility in changing upper body brands and models.
- New internal structural layout to enhance the dissipation of stress throughout the center frame.
- Extensively use of high strength steel
- Increased rigidity and torsion resistant by at least 30%.

TRACK CHAIN

- Improved track link design to minimize direct contact with sprocket which extends sprocket life span.
- It is entirely in-house design and manufacture to ensure proper quality control.
- The criterion of a good design is that it has to perform reliably under various working conditions.
- The track chain is laser trimmed to extremely tight tolerance.

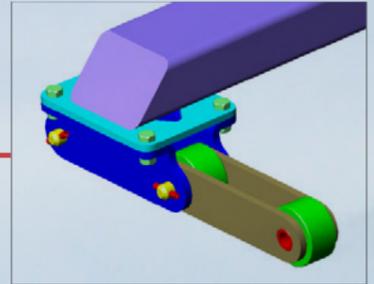


AXLE AND SPROCKET

- New sprocket design, lighter and stronger.
- Steel strength increased by 100%.
- Wear resistance property increased by 100%.
- Reduced maintenance cycle and operating cost.


SUPPLEMENTARY PONTOONS

- Supplementary pontoons can be added on each side to boost stability in deeper water operation.
- Spuds attached to supplementary pontoons help to overcome buoyancy effect, and enhanced operability.



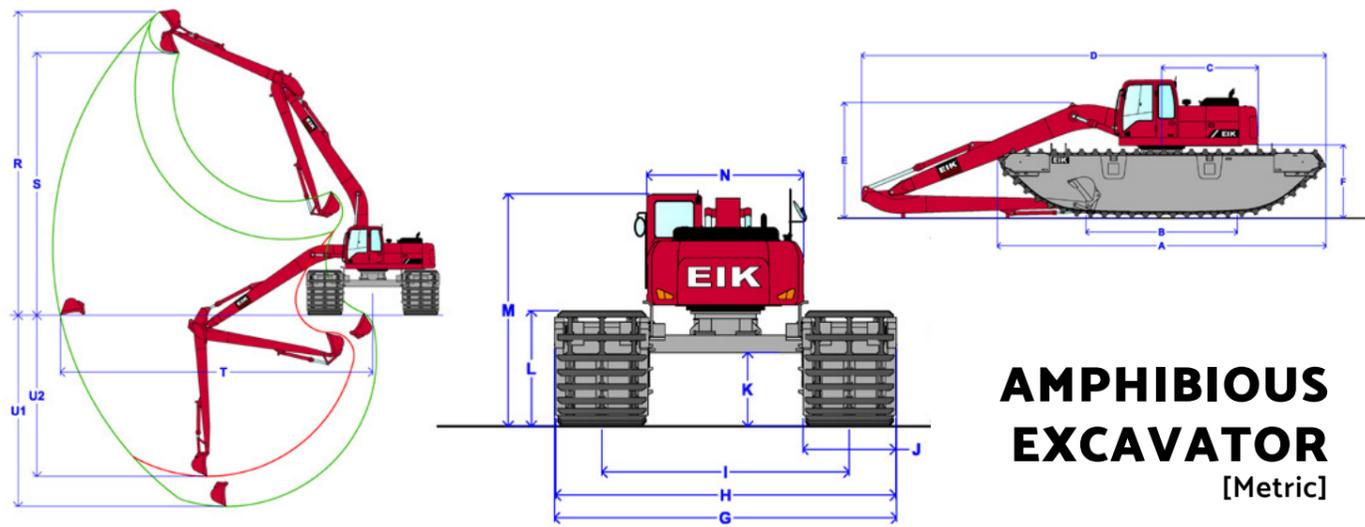

AMPHIBIOUS EXCAVATOR [Metric]

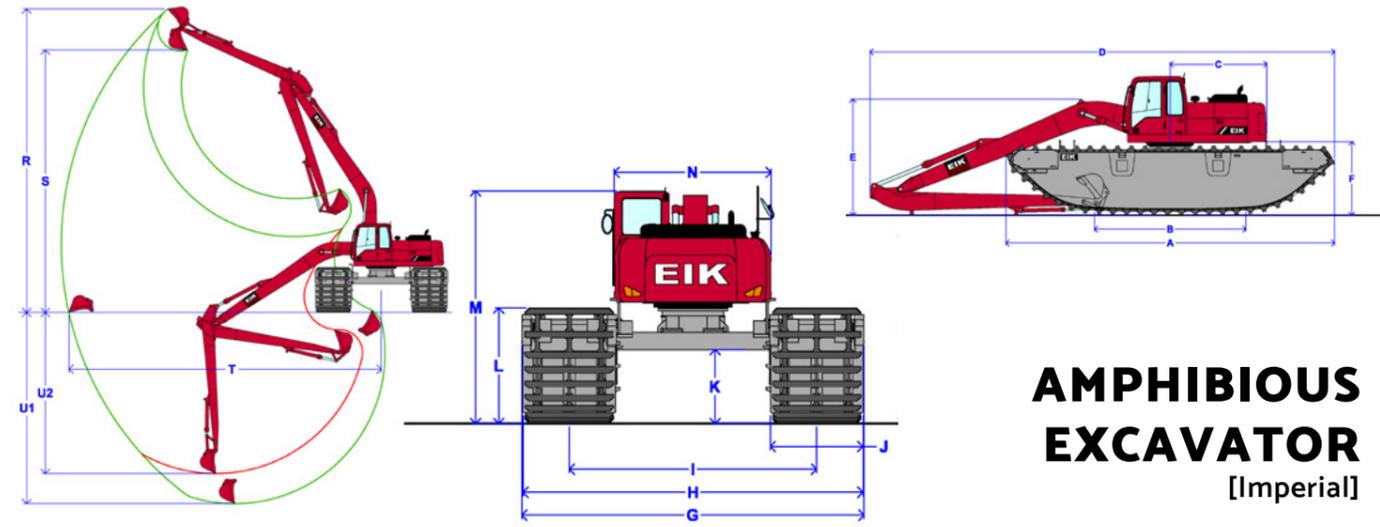

AMPHIBIOUS EXCAVATOR [Imperial]

Dim (m)	Description	Amphibious Undercarriage Models									
		AM60	AM70	AM80	AM140	AM200	AM250	AM300	AM350	AM400	AM450
		For 3.5-4.5 ton class excavator	For 5-6 ton class excavator	For 7-8 ton class excavator	For 12-14 ton class excavator	For 20-23 ton class excavator	For 24-27 ton class excavator	For 28-30 ton class excavator	For 33-38 ton class excavator	For 39-43 ton class excavator	For 44-48 ton class excavator
A	Max. Track Length	5.56	6.42	6.95	9.29	9.63	9.63	10.84	11.84	11.75	11.76
B	Track Length On Ground	2.75	2.90	3.20	4.30	4.50	4.50	5.20	5.70	6.00	6.00
C	Rear Upper Structure Length	0.85	1.58	1.75	2.13	2.85	3.00	3.19	3.50	3.50	3.56
D	Overall Length	7.90	7.47	9.25	12.24	13.55	14.41	15.55	16.59	17.20	18.00
E	Height of Boom	2.40	2.28	2.90	2.95	3.47	3.55	4.10	4.12	4.28	4.30
F	Counterweight Clearance	1.52	1.62	1.73	1.84	2.17	2.20	2.35	2.35	2.40	2.40
G	Overall Width, min/max (outwardly extendable)	2.78/3.48	2.80/3.60	3.39/4.19	4.02/5.12	4.50/5.98	5.20/ 6.64	5.94/6.94	6.00/7.00	6.00/7.00	6.43/7.43
H	Undercarriage Width, min/max	2.75/3.45	2.76/3.56	3.36/4.16	3.94/5.04	4.47/5.95	5.17/6.61	5.91/6.91	5.97/6.97	5.97/6.97	6.40/7.40
I	Track Gauge, min/max	1.75/2.45	1.76/2.56	2.06/2.86	2.49/3.59	2.85/4.33	3.25/4.69	3.99/4.99	4.02/5.02	4.02/5.02	4.25/5.25
J	Track Cleat Width	1.00	1.00	1.30	1.45	1.62	1.92	1.92	1.95	1.95	2.15
K	Min. Ground Clearance	1.01	1.01	1.15	1.12	1.30	1.30	1.29	1.13	1.16	1.10
L	Track Height	1.46	1.51	1.65	1.69	2.03	2.03	2.03	2.03	2.19	2.19
M	Overall Cab Height	3.46	3.55	3.65	3.77	4.08	4.12	4.27	4.30	4.30	4.36
N	Upper Structure Overall Width	1.50	1.95	2.26	2.45	2.54	2.85	2.96	2.99	3.09	3.53
R	Max. Cutting Height	6.50	7.10	7.95	11.40	12.40	13.70	14.60	15.30	15.20	16.30
S	Max. Loading Height	5.20	5.75	6.30	9.30	10.50	11.40	12.10	12.80	12.70	13.80
T	Recommended Outreach	7.00	6.55	8.00	12.00	14.00	15.00	16.00	17.00	18.00	20.00
U1	Max. Digging Depth from Front	3.70	3.50	3.80	7.30	8.90	9.40	9.90	11.00	12.50	13.90
U2	Max. Digging Depth from Side	3.50	3.50	3.40	6.50	7.20	7.20	8.50	9.60	10.40	11.30
	Bucket Capacity (m ³)	0.13	0.11	0.25	0.40	0.50	0.70	0.80	0.90	1.10	1.10

Dim (ft & in)	Description	Amphibious Undercarriage Models									
		AM60	AM70	AM80	AM140	AM200	AM250	AM300	AM350	AM400	AM450
		For 7,700-9,900 lbs excavator	For 11,000-13,200 lbs excavator	For 15,400-17,600 lbs excavator	For 26,400-30,800 lbs excavator	For 44,000-50,600 lbs excavator	For 52,800-59,400 lbs excavator	For 61,600-66,000 lbs excavator	For 72,600-83,600 lbs excavator	For 85,800-94,600 lbs excavator	For 96,800-105,600 lbs excavator
A	Max. Track Length	18' 3"	21' 1"	22' 10"	30' 6"	31' 7"	31' 7"	35' 7"	38' 10"	38' 7"	38' 7"
B	Track Length On Ground	9' 0"	9' 6"	10' 6"	14' 1"	14' 9"	14' 9"	17' 1"	18' 8"	19' 8"	19' 8"
C	Rear Upper Structure Length	2' 9"	5' 2"	5' 9"	7'	9' 4"	9' 10"	10' 6"	11' 6"	11' 6"	11' 8"
D	Overall Length	25' 11"	24' 6"	30' 4"	40' 2"	44' 5"	47' 3"	51'	54' 5"	56' 5"	59' 1"
E	Height of Boom	7' 10"	7' 6"	9' 6"	9' 8"	11' 5"	11' 8"	13' 5"	13' 6"	14' 1"	14' 1"
F	Counterweight Clearance	5'	5' 3"	5' 8"	6'	7' 1"	7' 3"	7' 9"	7' 9"	7' 10"	7' 10"
G	Overall Width, min/max (outwardly extendable)	9' 1"/ 11' 5"	9' 2"/ 11' 9"	11' 1"/ 13' 9"	13' 2"/ 16' 10"	14' 9"/ 19' 7"	17' 1"/ 21' 9"	19' 6"/ 22' 9"	19' 8"/ 23' 0"	19' 8"/ 23' 0"	21' 1"/ 24' 5"
H	Undercarriage Width, min/max	9' 0"/ 11' 4"	9' 1"/ 11' 8"	11' / 13' 8"	12' 11" / 16' 6"	14' 8" / 19' 6"	17' / 21' 8"	19' 5"/ 22' 8"	19' 7"/ 22' 3"	19' 7"/ 22' 3"	21' / 24' 3"
I	Track Gauge, min/max	5' 9" / 8' 0"	5' 9" / 8' 4"	6' 9" / 9' 5"	8' 2" / 11' 9"	9' 4" / 14' 2"	10' 8" / 15' 5"	13' 1" / 16' 4"	13' 2" / 16' 6"	13' 2" / 16' 6"	13' 11" / 17' 3"
J	Track Cleat Width	3' 3"	3' 3"	4' 3"	4' 9"	5' 4"	6' 4"	6' 4"	6' 5"	6' 5"	7' 1"
K	Min. Ground Clearance	3' 4"	3' 3"	3' 9"	3' 8"	4' 3"	4' 3"	4' 3"	3' 8"	3' 10"	3' 7"
L	Track Height	4' 10"	5' 0"	5' 5"	5' 7"	6' 8"	6' 8"	6' 8"	6' 8"	7' 2"	7' 2"
M	Overall Cab Height	11' 4"	11' 7"	12'	12' 4"	13' 5"	13' 6"	14'	14' 1"	14' 1"	14' 4"
N	Upper Structure Overall Width	4' 11"	6' 4"	7' 5"	8'	8' 4"	9' 4"	9' 9"	9' 10"	10' 2"	11' 7"
R	Max. Cutting Height	21' 4"	23' 3"	26' 1"	37' 5"	40' 8"	44' 11"	47' 11"	50' 2"	49' 10"	53' 6"
S	Max. Loading Height	17' 1"	18' 10"	20' 8"	30' 6"	34' 5"	37' 5"	39' 8"	42'	41' 8"	45' 3"
T	Recommended Outreach	23' 0"	21' 6"	26' 3"	39' 4"	45' 11"	49' 3"	52' 6"	55' 9"	59' 1"	65' 7"
U1	Max. Digging Depth from Front	12' 2"	11' 6"	12' 6"	23' 11"	29' 2"	30' 10"	32' 6"	36' 1"	41'	45' 7"
U2	Max. Digging Depth from Side	11' 6"	11' 6"	11' 2"	21' 4"	23' 7"	23' 7"	27' 11"	31' 6"	34' 1"	37' 1"
	Bucket Capacity (yd ³)	0.17	0.14	0.33	0.52	0.65	0.92	1.05	1.18	1.44	1.44

* The above specifications are for reference only, actual working range may vary from machine models.

** For the benefit of continuous product improvement, specifications are subjected to change without prior notice.

* The above specifications are for reference only, actual working range may vary from machine models.

** For the benefit of continuous product improvement, specifications are subjected to change without prior notice.

EIK PROVIDE SOLUTIONS FOR YOUR BUSINESS



Mining

Basic planning for mining operations will include where, when and what methods are to be used to excavate the natural deposit will include the use of reliable heavy machineries with robust attachments under the harshest environment.



Winterland

Winter is associated with snow and freezing temperatures. During this time, road maintenance, winter constantly change and during winter, road maintenance become most important and the services involve a large number of operation. For contractors, it is utmost important to choose high quality and dependable attachments to maintain the roadworks during wintertime. With the quality track chain and track shoe, EIK AM series can work well during winter conditions.



Wetlands

EIK Marsh Buggy naturally excels in swampy and "difficult" conditions as it glides through with ease to help in maintaining its natural habitat.



Reservoir

EIK Amphibious Excavator/ Marsh Buggy helps to maintain the serenity and purity of the world's precious resources.

River Shore

Pollution in our rivers from industrial sewage and agricultural runoff is harmful to nature, wildlife and humans. EIK products can help the community to clean up and make rivers a safer and healthier environment.

River

River, being the main source of life, has to be maintained with constant cleaning and dredging with Amphibious and robotically welded Super Long Front for its natural continuous flow.

Coastal Protection

Coastal protection provides defense against flooding and erosion, caused by waves and tides, winds, currents and littoral drift and the construction of breakwater help to protect the nature. The construction work done easily now by heavy equipments and attachments like Excavator, Long Reach, Grapple, Bucket which the same technique would have been used for road embankments and fortification of earthworks.



EIK GROUP OF COMPANIES

EIK Engineering Sdn Bhd (HQ)

No. 10, Jalan SiLC 1/4,
Kawasan Perindustrian SiLC,
79200, Iskandar Puteri, Johor, Malaysia
Tel: +607 - 531 9922
Fax: +607 - 531 9919
Website : www.eikengineering.com
Email: sales@eikengineering.com.my
/ info@eikengineering.com

EIK Lam Engineering Sdn Bhd

24, Jalan Mega 1/4,
Taman Perindustrian Nusa Cemerlang,
79200 Nusajaya, Johor, Malaysia
Tel: +607 - 554 2700
Fax: +607 - 554 1785
Email: sales@eiklam.com.my

AMP Engineering Works Sdn Bhd

No 28, Jalan Astaka U8/84A,
Bukit Jelutong, 40150 Shah Alam, Selangor
Tel: +603 - 7859 9221
Fax: +603 - 7859 9231
Website : www.ampdredging.com
Email: ampoffice99@gmail.com

TCL Machinery (M) Sdn Bhd

No. 9, Jalan Tiong Emas 6,
Kawasan Perindustrian Tiong Nam,
81100 Johor Bahru, Johor, Malaysia.
Tel: +607 - 361 6546/ +607 - 364 8695
Fax : +607 - 364 8679
Website : www.tcl-machinery.com
Email: enquiry@tcl-machinery.com

REGIONAL SALES OFFICES

EIK Solutions LLC (United States)

14430 Grant Road, Cypress, Texas
77429 United States
Tel: +1 832-850-4590
Website : www.eiksolutions.com
Email: sales@eiksolutions.com

EIK Engineering Sdn Bhd (Kuala Lumpur Branch)

No 28, Jalan Astaka U8/84A,
Bukit Jelutong, 40150 Shah Alam, Selangor
Tel: +603 - 7859 9221
Fax: +603 - 7859 9231
Email: sales_kl@eikengineering.com.my

EIK Engineering Pte. Ltd (Singapore)

135 Jurong Gateway Road, #03-315
Singapore 600135
Tel: +65 - 9815 9685
Email: sales@eikengineering.com
/ info@eikengineering.com

EIK Engineering Sdn Bhd (Sarawak Branch)

Lot 1176, Section 66
Kuching Town Land District
Jalan Utama, Pending Industrial Estate
93450 Kuching, Sarawak, Malaysia
Tel: +6082 - 335 922
Fax: +6082 - 345 922
Email: sales_sarawak@eikengineering.com.my



**WE BUILD WITH PRIDE
YOU USE WITH TRUST**



www.eikengineering.com