



## DESIGN FEATURE



## ABOUT EIK ENGINEERING.

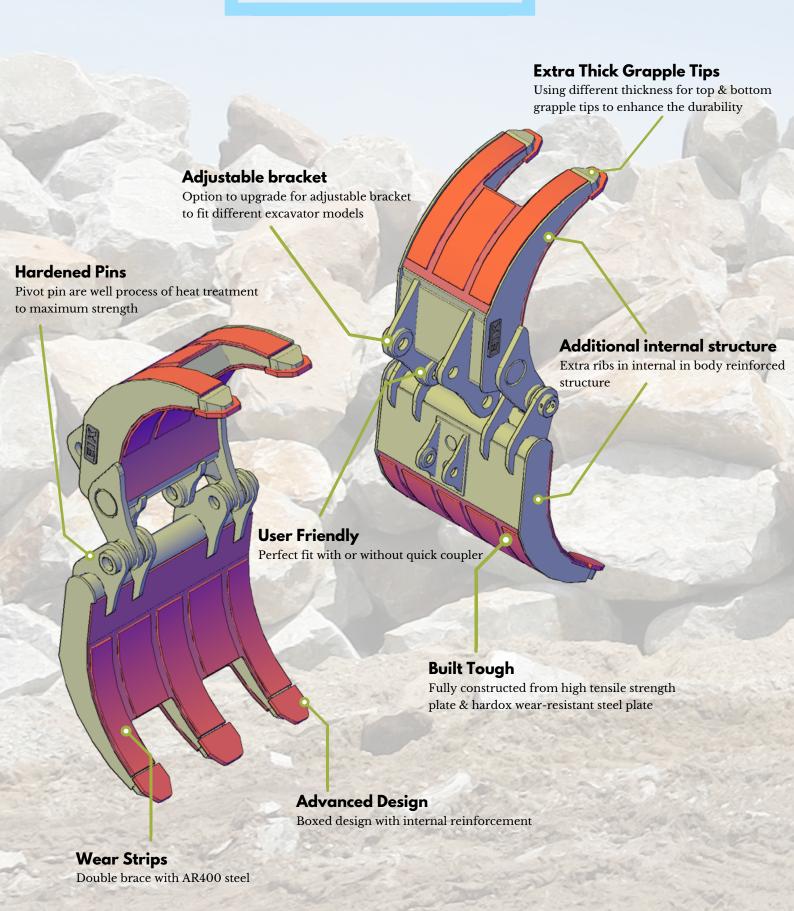

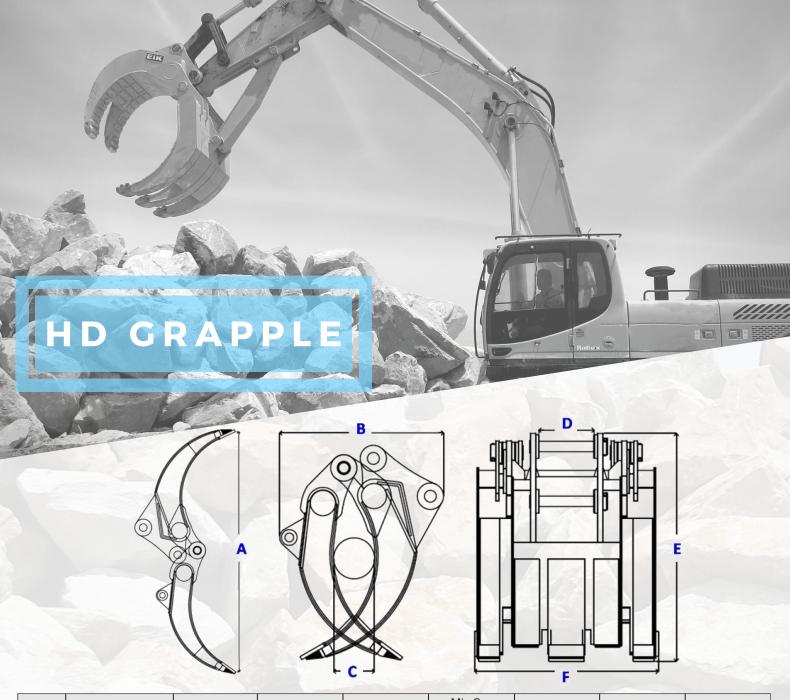

Model	Excavator Class		Approximate Weight		Max Jaw Opening ( A )		Length (B)		Min Gap Between Jaws ( C )		Distant Between Lugs ( D )		Height (E)		Width (F)	
	ton	lb	kg	lb	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
GP16xx	10-16	22,000 - 35,200	895	1,969	2,135	84	980	39	241	9	255	10	1,238	49	1,020	40
GP20xx	18-22	39,600 - 48,400	1,580	3,410	2,400	87	1,120	44	275	11	325	12.8	1,470	58	1,170	46
GP22xx	24-30	52,800 - 66,000	2,100	4,620	2,815	111	1,244	49	300	12	420	16.5	1,620	64	1,360	54
GP33xx	33-36	72,600 - 99,000	2,950	6,490	3,024	119	1,415	55	460	18	470	18.5	1,800	70	1,450	57
GP45xx	40-45	88,000 - 99,000	3,500	7,700	3,000	122	1,480	58	495	19	445	17	1,895	75	1,570	63
GP50xx	50-60	101,200 - 132,000	4,360	9,592	3,255	128	1,500	59	537	21	470	18.5	2,010	79	1,630	64
GP80xx	70-90	154,000 - 176,000	5,700	12,540	3,575	140	1,710	67	564	22	535	21	2,176	85	1,740	68
GP98xx	100-120	220,000 - 264,000	7,050	15,543	3,900	153	2,040	80	670	26	674	27	2,430	96	1,970	78

EIK ENGINEERING
No.10, Jalan SiLC 1/4,
Kawasan Perindustrian SiLC,
79200 Iskandar Puteri, Johor, Malaysia.

sales@eikengineering.com www.eikengineering.com Contact number : +607 5319922

