



DESIGN FEATURE



ABOUT EIK ENGINEERING.

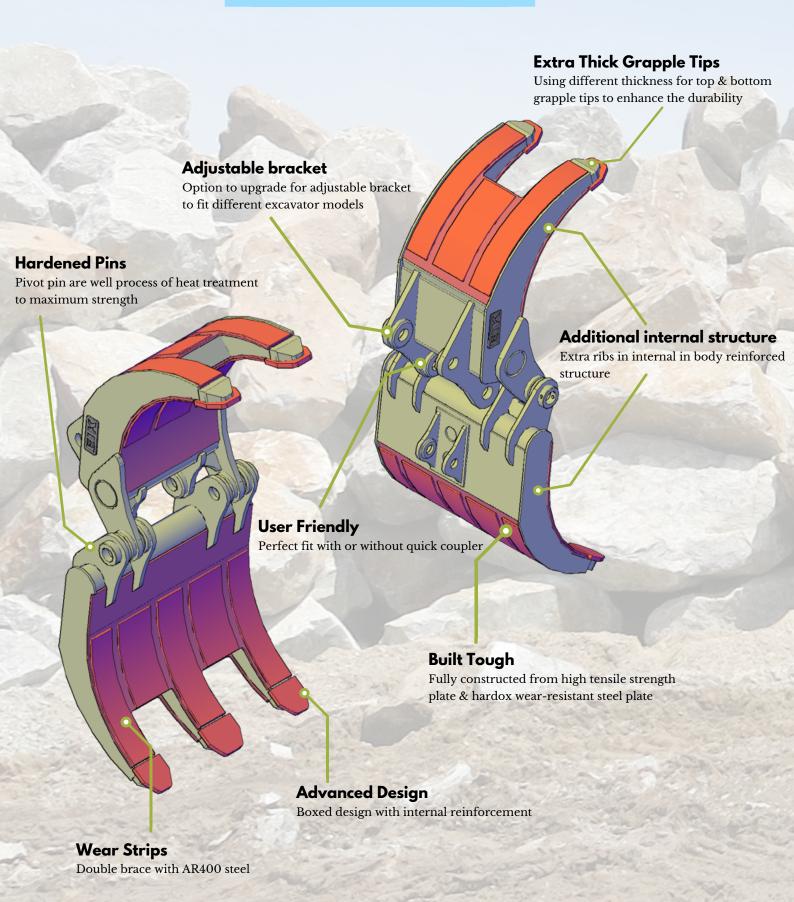

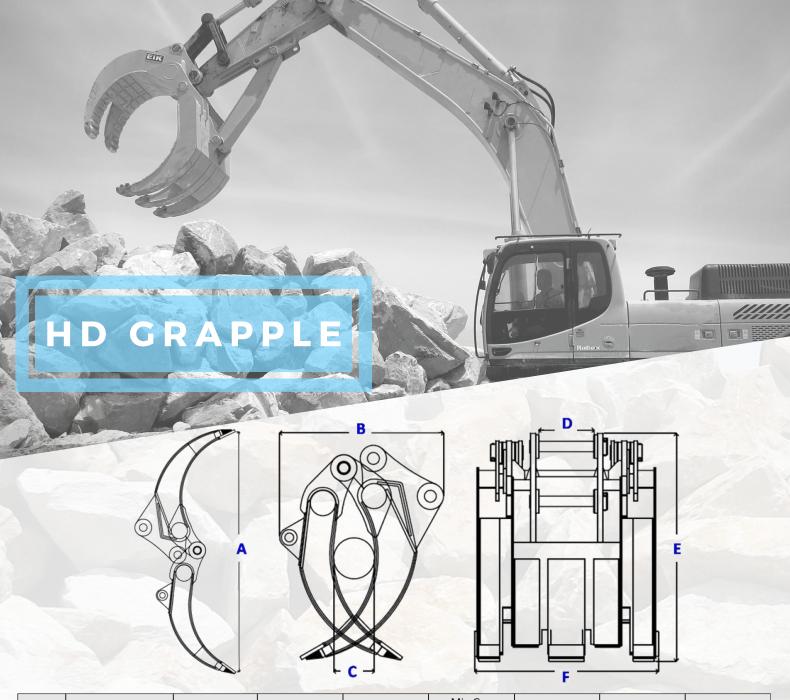

Model	Excavator Class		Approximate Weight		Max Jaw Opening (A)		Length (B)		Min Gap Between Jaws (C)		Distant Between Lugs (D)		Height (E)		Width (F)	
	ton	lb	kg	lb	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
GP16xx	10-16	22,000 - 35,200	895	1,969	2,135	84	980	39	241	9	255	10	1,238	49	1,020	40
GP20xx	18-22	39,600 - 48,400	1,580	3,410	2,400	87	1,120	44	275	11	325	12.8	1,470	58	1,170	46
GP22xx	24-30	52,800 - 66,000	2,100	4,620	2,815	111	1,244	49	300	12	420	16.5	1,620	64	1,360	54
GP33xx	33-36	72,600 - 99,000	2,950	6,490	3,024	119	1,415	55	460	18	470	18.5	1,800	70	1,450	57
GP45xx	40-45	88,000 - 99,000	3,500	7,700	3,000	122	1,480	58	495	19	445	17	1,895	75	1,570	63
GP50xx	50-60	101,200 - 132,000	4,360	9,592	3,255	128	1,500	59	537	21	470	18.5	2,010	79	1,630	64
GP80xx	70-90	154,000 - 176,000	5,700	12,540	3,575	140	1,710	67	564	22	535	21	2,176	85	1,740	68
GP98xx	100-120	220,000 - 264,000	7,050	15,543	3,900	153	2,040	80	670	26	674	27	2,430	96	1,970	78

EIK ENGINEERING
No.10, Jalan SiLC 1/4,
Kawasan Perindustrian SiLC,
79200 Iskandar Puteri, Johor, Malaysia.

sales@eikengineering.com www.eikengineering.com Contact number : +607 5319922

